

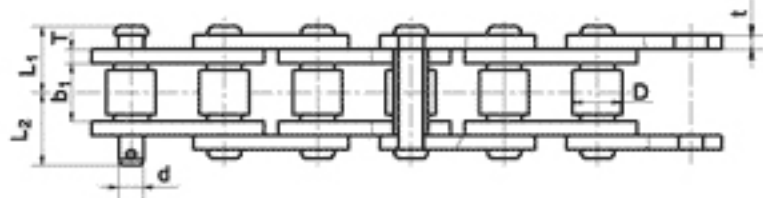
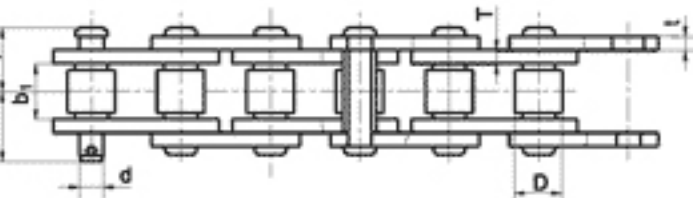
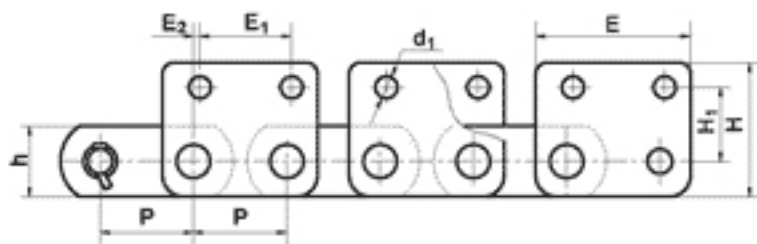
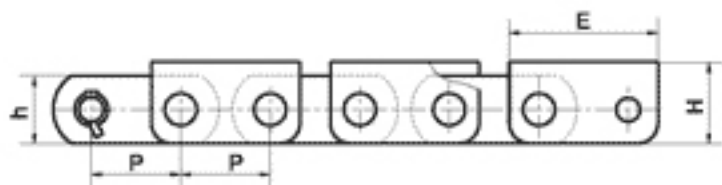
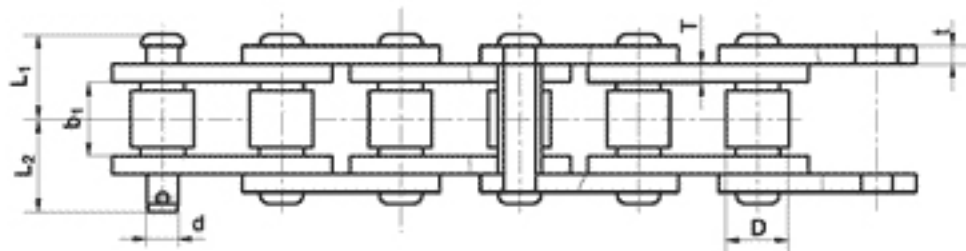


# 挖沟机链

## Trencher Chains

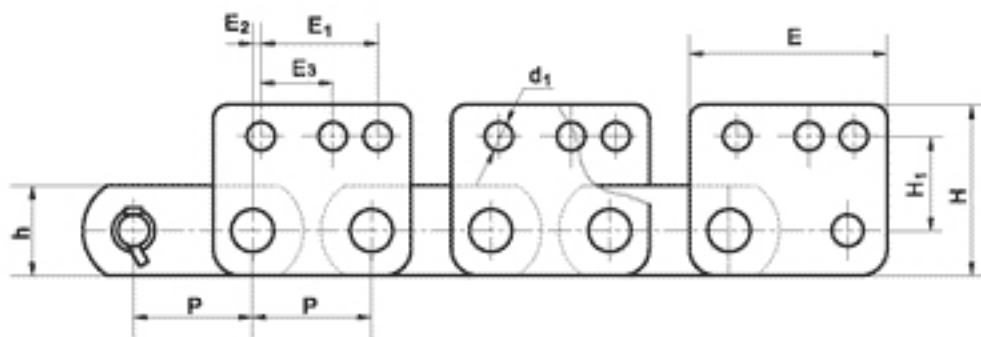

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between sidebars b <sub>1</sub> (min) mm	链板 Sidebar								销轴 Pin		滚子直径 Roller diameter D(max) mm	最小抗拉 强度 Ultimate tensile strength Q <sub>min</sub> kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m	
			t/T mm	h mm	H <sub>1</sub> mm	H mm	E mm	E <sub>1</sub> mm	E <sub>2</sub> mm	d <sub>1</sub> mm	d mm	L <sub>1</sub> mm					L <sub>2</sub> mm
2250GL-M	42.01	25.2	4.9	31.8	/	38.1	69.8	/	/	/	11.1	26.9	29.4	22.23	120	13.2	6.57
2250GL-M2	42.01	25.5	6.4	31.8	33.3	60.3	69.8	41.3	2.9	9.95	11.1	29.9	33.9	22.23	120	12.6	9.47

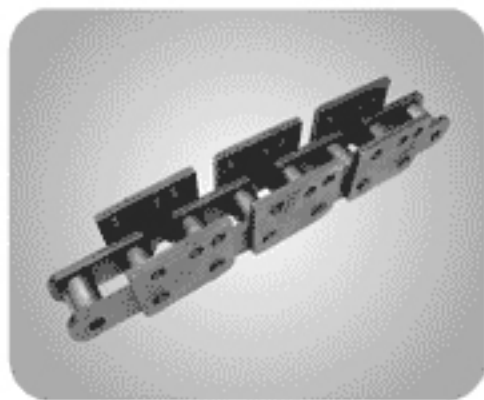

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between sidebars b <sub>1</sub> (min) mm	链板 Sidebar								销轴 Pin		滚子直径 Roller diameter D(max) mm	最小抗拉 强度 Ultimate tensile strength Q <sub>min</sub> kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m		
			t/T mm	h mm	H <sub>1</sub> mm	H mm	E mm	E <sub>1</sub> mm	E <sub>2</sub> mm	E <sub>3</sub> mm	d <sub>1</sub> mm	d mm					L <sub>1</sub> mm	L <sub>2</sub> mm
2250GL-M3	42.01	25.2	4.9	31.8	33.3	60.3	69.8	41.3	2.9	25.4	9.95	11.1	26.9	29.4	22.23	120	11.8	7.78